


Technical Data

Surge protection (for Ventus/V200A)

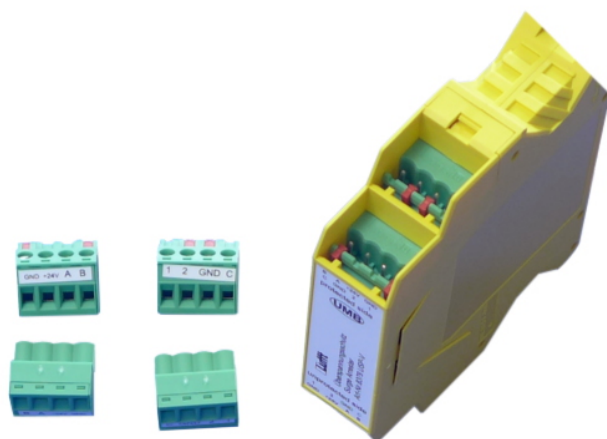

- **Article number**
8379.USP-V

Surge protection (for Ventus/V200A)

General	
Material	Polyamide, yellow
Dimensions	22.5 x 99 x 92 mm
Protection type	IP20
Connections	COMBICON connector 0.2 - 2.5 mm ² (AWG 24 - 12)
Operating temperature	-30...70 °C
Admissible height above absolute altitude	N/A

Storage conditions	
Admissible storage temperature	-40...70 °C
Operating rel. humidity	0...100 % RH

Communication backup path	
Max. operating current	100 mA
Max. operating voltage	33 V
Rated leakage current	20 kA (8/20 μs)

Supply voltage backup path	
Max. operating current	6 A
Max. operating voltage	25 V
Rated leakage current	20 kA (8/20 μs)